

AZTEC

PRO FLASH FLEXI ROLLS

**AVAILABLE IN
BLACK & GREY**

INTRODUCING PRO FLASH

**The latest innovative
and high quality
plumbing product
from Aztec**

- ✓ No more heavy lifting - a great alternative to lead based products
- ✓ Meets safe drinking water standards (AS/NZS 40200)
- ✓ Far easier and quicker to install than traditional lead rolls and sheets
- ✓ Suitable for most roofing profiles
- ✓ Clean and green - Non-toxic

SEE OVER FOR SPECIFICATIONS

CALL FOR ALL PRODUCT RANGES & SIZES

P: (03) 9768 2394 F: (03) 9768 2580

Email: orders@aztecau.com.au - www.aztecau.com.au

70 Logis Boulevard, Dandenong South VIC AUSTRALIA 3175



Aussie Tough. Aztec Smart.



FLEXI ROLL

Aztec Pro Flash® Flexi Roll is developed as an alternative for lead tile flashings, but it has become a more versatile roof solution than the traditional lead flashings. Unlike the lead flashings which are normally used on tile roof, it suits almost any roof materials or profiles including metal, tile, fibreglass, polycarbonate etc.

Pro Flash® Flexi Roll membrane material contains an innovative polymer made of advanced isobutylene EPDM embedded with aluminium mesh.

The **Pro Flash® Flexi Roll** base material has the desired malleability same as the lead. However, it offers many more benefits than the lead base flashing does.

KEY FEATURES LEAD FREE FLASHING:

- ✓ Lead free flashing - No More Heavy Lifting
- ✓ Suitable for drinking water application, Complies with AS/NZS 4020
- ✓ Safer and Toxic Free
- ✓ UV Rated / Tested
- ✓ Complies with the AS/NZS 2904: 1995 Damp Proof Courses and Flashings
- ✓ Environment friendly - Non-toxic - Lead Free
- ✓ Full adhesive backing
- ✓ Easy and quick to install
- ✓ Suitable for almost any roof materials and profiles

The base material of **Pro Flash® Flexi Roll** complies with AS/NZS 2904: 1995 Damp-Proof Courses and Flashings. The **Pro Flash® Flexi Roll** exhibits great weathering and UV resistance thus guarantees the long-term performance for outdoor applications.



When **Pro Flash® Flexi Roll** is installed by a qualified tradesperson, it will form a water-tight seal on your roof that will be long lasting and complete the required seal from any water leakage.

INSTALLATION BENEFITS:

- ✓ Quick installation
- ✓ Easy to dress into shape by hand or soft hammer tool
- ✓ Easy to cut with scissors or knife if required
- ✓ No health risks such as lead poisoning associated with lifting heavy materials

NOTES:

- ✓ Avoid pressure load by sharp objects (eg. tile notches)
- ✓ Maximum working length without joints = full length roll of 5m
- ✓ Can be joined by overlapping length by a minimum of 50mm

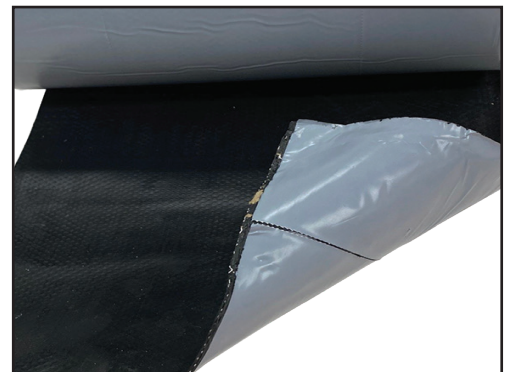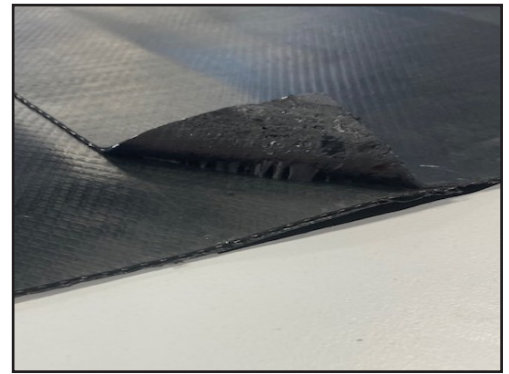

Base Material Properties

Thickness, mm	1.9mm ~ 2.1mm
Density	1.4 ~ 1.7 g/cm ³
Tensile strength	≥ 2 MPa
Stretch ability	
Longitudinal	Up to 50%
Transverse	Up to 15%
Service Temperature	-40 °C to +100 °C

Product Range

Available in 3 roll widths	Available in BLACK, LIGHT GREY & DARK GREY
280mm width x 5m	AZTPR280
370mm width x 5m	AZTPR370
560mm width x 5m	AZTPR560

Easy & Quick

Light & Safe

Innovative & Lead Free



SCAN ME